



of National Level Inspection and Testing Center, the abbreviation and
NETEC Inspection and Testing (Beijing) Co., Ltd. (National
Level Inspection and Testing Center) both are NETEC.

3. Type test report is invalid without signatures of test, verification, approval,
without approval certificate of type test institute number or is

Lift type test report..... U



1 Technical parameters and configuration of the sample

Name of product	Traction machine brake		
Model of product	DZE		
System mass range	1400 kg~7800 kg	Rated load range	450 kg~2000 kg
Balance coefficient	0.40~0.50	Car weight range	600 kg~3400 kg
Anticipated highest speed before deceleration occurs ^{Note1}	1.32 m/s	Suspension ratio	2:1
Type of stopping parts	Traction machine brake	Drive mode	Traction drive
Site of action	Traction sheave	Tripping mode	Trigger when losing power
Response time	200 ms	Response time of detecting subsystem	40 ms
Response time of power supply device (contactor) equipped with cut-off brake ^{Note2}	60 ms		
Test speed for final inspection		0.25 m/s	
Applicable range	Range of inclination angle applf l an		

985-D 7.19 NO 0€(0! 2





告
好



告
好

3 Check and test the sample


No.	Items No.	Check and test items	Check and test results	Conclusion
1	T6.1	Action site	Acting on traction sheave Comply with requirements	Pass
2	T6.1.1	Stopping subsystem certified for a single mass	/	/
3	T6.1.2	Stopping subsystem certified for different masses	<p>Maximum system mass representing an empty car in up direction: Minimum of highest speed before deceleration occurs is 1.380 m/s. Arithmetic mean value of average deceleration is 3.611 m/s². Maximum deceleration: 4.603 m/s² Arithmetic mean value of stopping distance is 0.286 m Maximum deviation of stopping distance is +3.1%.</p> <p>Maximum response time is 99 ms. Maximum total moving distance: 0.701 m.</p> <p>Maximum system mass representing a car carrying the rated load in down direction: Minimum of highest speed before deceleration occurs is 1.382 m/s. Arithmetic mean value of average deceleration is 2.879 m/s². Arithmetic mean value of stopping distance is 0.355 m. Maximum deviation of stopping distance is -3.7%.</p> <p>Maximum response time is 96 ms. Maximum total moving distance: 0.745 m.</p>	Pass

No.	Items No.	Check and test items	Check and test results	Conclusion
3	T6.1.2	Stopping subsystem certified for different masses	<p>Minimum system mass representing an empty car in up direction: Minimum of highest speed before deceleration occurs is 1.378 m/s. Arithmetic mean value of average deceleration is 4.861 m/s². Maximum deceleration: 9.397 m/s² Arithmetic mean value of stopping distance is 0.237 m Maximum deviation of stopping distance is +2.9%. Maximum response time is 87 ms. Maximum total moving distance: 0.652 m.</p> <p>Minimum system mass representing a car carrying the rated load in down direction: Minimum of highest speed before deceleration occurs is 1.380 m/s. Arithmetic mean value of average deceleration is 4.450 m/s². Arithmetic mean value of stopping distance is 0.269 m. Maximum deviation of stopping</p>	



No.	Items No.	Check and test items	Check and test results	Conclusion
5	T6.1.4	Moving distance corresponding to the test speed	<p>The calculation document complies with requirements</p> <p>Carry out 3 tests with the maximum system mass representing an empty car in up direction.</p> <p>Test speed: 0.25 m/s</p> <p>Maximum speed under test speed condition: 0.489 m/s</p> <p>Maximum stopping distance: 0.058 m (excluding the distance before deceleration)</p> <p>Maximum moving distance: 0.156 m (including the moving distance within the response time of the cut-off brake power supply device)</p> <p>Maximum moving distance: 0.166 m (including the moving distance within the response time of the detecting subsystem and the cut-off brake power supply device)</p> <p>Comply with requirements</p>	Pass
6	T6.2	Nameplate	Comply with requirements	Pass

4 Sample photo

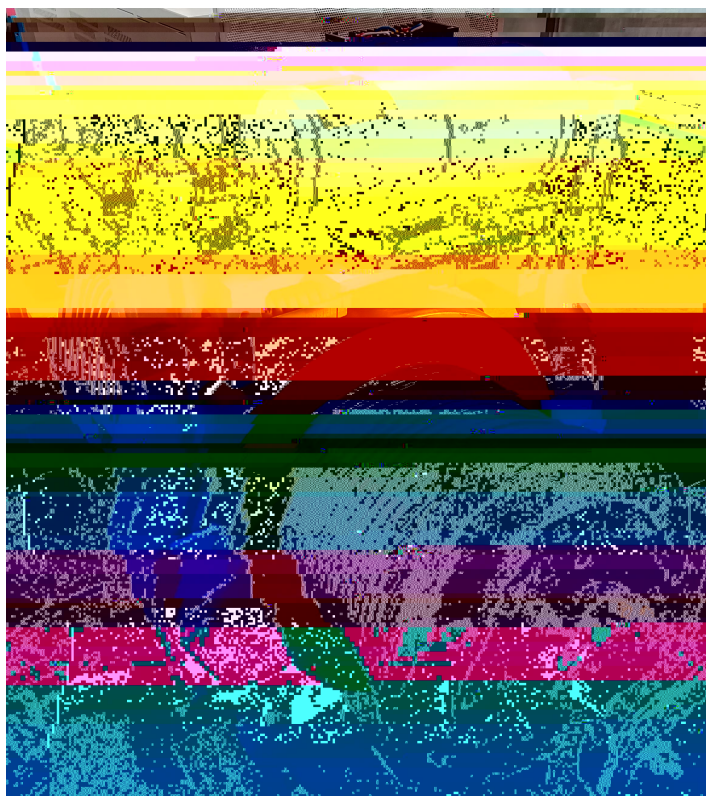

5 Change information of type test report

When the name or address of the applicant and the overseas manufacturer changed, the applicant should submit the change application and the corresponding supporting information to NETEC. After confirmation, NETEC should indicate the change on the attached page “Change information of type test report”, take back the original type test certificate and issue a new one.

